


Data sheet

Hydraulic Piston
Diaphragm Pump

TYPE: HMQ-M-80-2000

FILTER PRESS/TRANSPORT

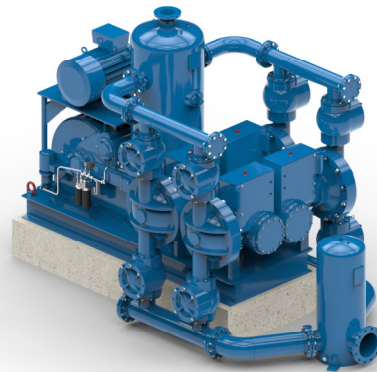

Technical specifications:

Material	Nodular cast iron
Diaphragm/Ball/Seats	NBR / PU with steel core / Hardened Stainless Steel
Electric motor	Max. 75 kW
Pressure	Max. 0.8 MPa (116 psi)
Volume flow	Max. 250 m ³ /h (1.100 GPM)
Pulsation dampener	Included
Suction flow stabilizer	Included
Painting	Prime-coated and painted (RAL 5015 80µm)
Diaphragm monitoring	Included

Dimensions:

Suction connection:	10" / 150 lbs (ANSI)
Pressure connection:	6" / 150 lbs (ANSI)
Size	Length: 4403 mm Width: 2428 mm Height: 3020 mm
Weight:	~ 6.500 Kg

Application/References:

<ul style="list-style-type: none"> Filter press feeding Sludge transport Thickener underflow Tailings transfer Backfilling 	<ul style="list-style-type: none"> Mining industry Oil and gas industry Water and sewage industry
---	--