
ABEL CM Compact Diaphragm Pump


Metal - Further models are available upon request

	A171	B211	B261	C261	B262	C262	E272	H332
Max. Flow Rate [m³/h] (gpm)	1.5 (6.5)	3 (13)	4 (17.5)	7 (30.5)	7 (30.5)	12 (53)	15 (66)	30 (132)
Max. Pressure [MPa] (psi)	2.5 (362)	2.5 (362)	2.5 (362)	2.5 (362)	2.5 (362)	2.5 (362)	2.5 (362)	2.5 (362)
Max. Stroke Rate [spm]	65	65	65	65	65	65	65	65
Suction Conn. [DN] (ANSI)	32 (1 1/4")	50 (2")	65 (2 1/2")	80 (3")	80 (3")	80 (3")	80 (3")	125 (5")
Discharge Conn. [DN] (ANSI)	32 (1 1/4")	50 (2")	65 (2 1/2")	65 (2 1/2")	65 (2 1/2")	65 (2 1/2")	65 (2 1/2")	80 (3")
AI Pump Monitoring Smart Pump Assistant	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

	A171 MA11107a	**B211** PZ10928a	**B261** MA11198a	**C261** MA11194a	**B262** MA11199a	**C262** MA11200a	**E272** MA11201a	**H332** MA10055d
L [mm] (without suction stabilizer)	925	1150	1275	1510	1130	1383	1383	1746
L1 [mm] (with suction stabilizer)	1425	1650	1645	1880	1500	1753	1753	2455
B [mm]	350	411	420	515	655	655	655	845
H [mm]	1400	1615	1971	2270	2330	2330	2330	2745
single-acting/ double-acting	single	single	single	single	double	double	double	double
Weight approx. [kg] (lbs)	220 (485)	340 (750)	430 (950)	540 (1190)	635 (1400)	710 (1565)	820 (1810)	1650 (3640)

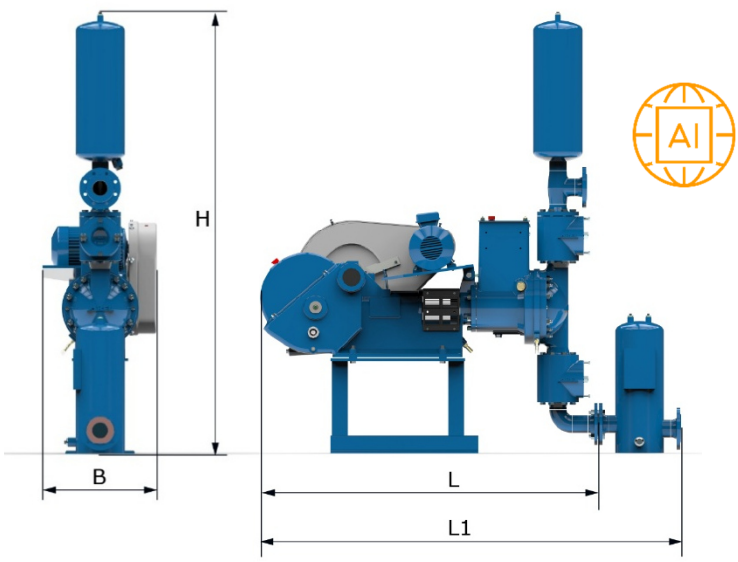

single-acting

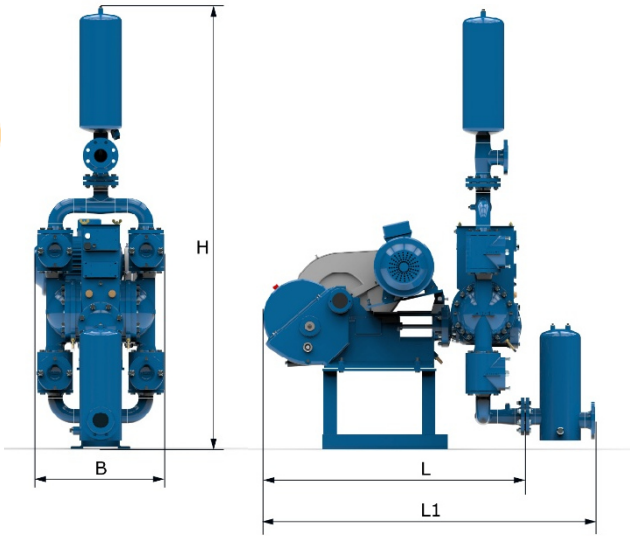

double-acting


ABEL GmbH
abel-mail@idexcorp.com
abelpumps.com

ABEL CM Compact Diaphragm Pump


Polypropylene - Further models are available upon request

	B261	C261	C262	E272
Max. Flow Rate [m³/h] (gpm)	4 (17.5)	7 (30.5)	12 (53)	15 (66)
Max. Pressure [MPa] (psi)	1.6 (232)	1.6 (232)	1.6 (232)	1.6 (232)
Max. Stroke Rate [spm]	65	65	65	65
Suction Connection [DN] (ANSI)	65 (2 1/2")	80 (3")	80 (3")	80 (3")
Discharge Connection [DN] (ANSI)	65 (2 1/2")	65 (2 1/2")	65 (2 1/2")	65 (2 1/2")
AI Pump Monitoring Smart Pump Assistant	Yes	Yes	Yes	Yes

	B261 MA11252a PZ11852a	**C261** MA11211a PZ11656a	**C262** MA11204a MA11228a	**E272** MA11204a MA11228a
L [mm] (without suction stabilizer)	1475	1710	1560	1560
L1 [mm] (with suction stabilizer)	1710	1910	1760	1760
B [mm]	415	450	810	810
H [mm]	1620	1577	2090	2090
single-acting/ double-acting	single	single	double	double
Weight approx. [kg] (lbs)	350 (775)	430 (950)	650 (1435)	650 (1435)

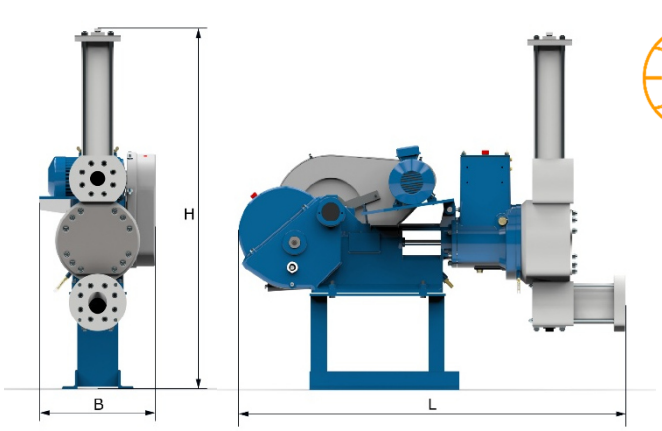

single-acting

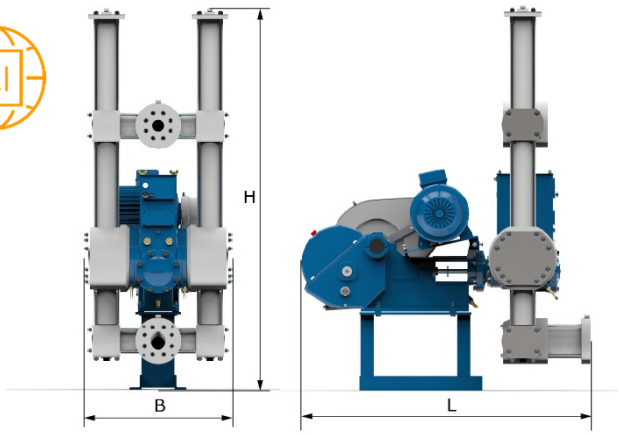

double-acting

ABEL GmbH
abel-mail@idexcorp.com
abelpumps.com